



WOOD FINISHES DIRECT

The following Technical Datasheet is provided by **Liberon**

Wood Finishes Direct cannot be held liable for the information contained within this document.

For purchasing information visit:
[Liberon Superior Decking Stain](#)



2.5L – 5L

SUPERIOR DECKING STAIN

- *Tough, durable weather protection*
 - *Reinforced water repellency*
 - *Anti-slip*
- *Biosourced formula - based on vegetable oils and modified bio-based resins*

Liberon Superior Decking Stain is a versatile product which gives a water and UV-resistant finish to most types of exposed timber. The finish will form a protective barrier against weathering, sunlight and extreme temperatures from -10°C to +35°C.

PREPARATION

Ensure the surface is clean, dry and free from previous finishes and dust. Lightly sand new wood and clean old wood with Liberon Tough Deck Clean and Revive. • **Hardwoods:** It is recommended to leave the wood exposed for up to 12 months before applying this product. This allows the grain in the wood to open and breathe and aids adhesion of the product.

APPLICATION

Apply the product in temperatures between 12°C and 25°C in dry weather. Stir very well before use to mix all the ingredients in the tin. Ensure the weather conditions will be dry for 24 hours before application. Apply a not too thick coat of Superior Decking Stain with a paint brush or roller. Allow to dry for 2 hours then apply a second coat. Any unabsorbed product remaining on the surface should be evened out with a brush to avoid unsightly marks. Leave to dry for at least 24 hours before use. Risk of self-combustion. Wet with water any textiles or tools soiled with the product and dispose of them in a tightly closed container. Remove as much of the oil as possible from the tools after use. Do not dispose of residues and washing water/solvents in the sink, toilet, sewer, bin, etc., in order to avoid discharge into the environment.

THE SECRET OF LIBERON

- For general maintenance, clean with water.
- During the next season, we recommend applying a further coat of Superior Decking Stain if necessary.
- Always replace the lid, otherwise the product can deteriorate.
- May not be suitable for some exotic hardwoods, test first on an inconspicuous area.





2.5L – 5L

SUPERIOR DECKING STAIN

- *Tough, durable weather protection*
 - *Reinforced water repellency*
 - *Anti-slip*
- *Biosourced formula - based on vegetable oils and modified bio-based resins*

Liberon Superior Decking Stain is a versatile product which gives a water and UV-resistant finish to most types of exposed timber. The finish will form a protective barrier against weathering, sunlight and extreme temperatures from -10°C to +35°C.

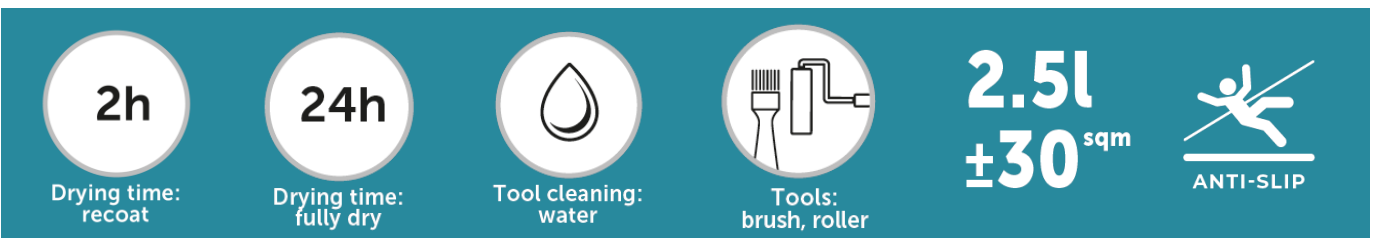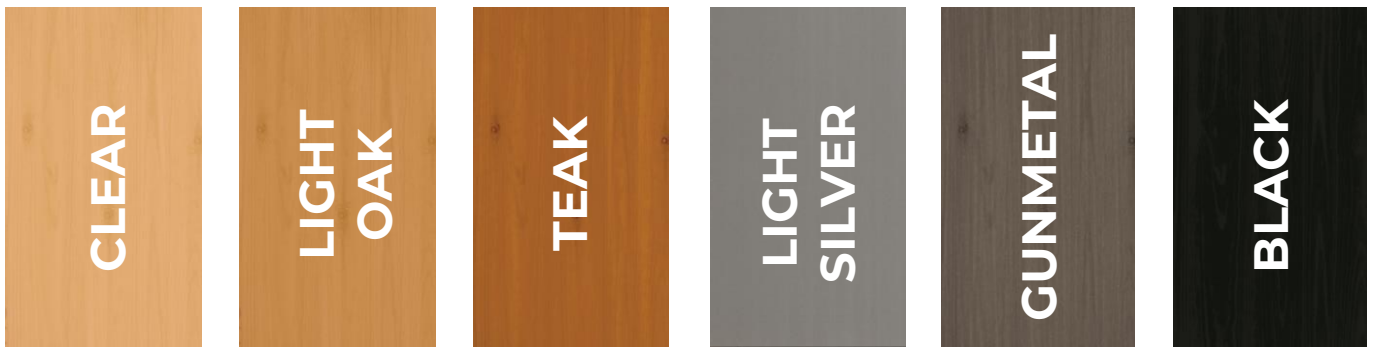

This product should be used in accordance with the manufacturer's instructions. Recommendations are for guidance only since conditions of use are completely beyond our control. For technical or practical information on this or other Liberon products please contact Liberon Technical Services on 01797 367555.

This notice is intended to provide information. The information is based on our current knowledge and experience based on conditions of use that comply with the standards or DTU in force. Given the multiplicity of factors that can influence the use of our products, they cannot exempt the user from his own experiences. No legal warranty can be derived from our information. This data sheet supersedes all previous editions.