



WOOD FINISHES DIRECT

The following Product Datasheet is provided by **Starcke**

Wood Finishes Direct cannot be held liable for the information contained within this document.

For purchasing information visit:


[Starcke \(Ersta\) 13 x 533mm Zirconia File Sanding Belts](#)

Product Information

341X - Metal

Product structure

| | | |
|---------------------------|---|--|
| Backing | Heavy X-weight cotton cloth | |
| Flexibility | | |
| Grain Type | Zirconia aluminium oxide + aluminium oxide | |
| Coating | closed | |
| Top Coat | <input type="checkbox"/> stearate <input type="checkbox"/> special top coat | |
| Manufactured Width | <input type="checkbox"/> 1400mm <input type="checkbox"/> 1430mm <input checked="" type="checkbox"/> 1650mm <input type="checkbox"/> others | |
| Form | | |
| Suitable for | <input type="checkbox"/> hand sanding <input checked="" type="checkbox"/> hand held machine sanding <input checked="" type="checkbox"/> machine sanding | |

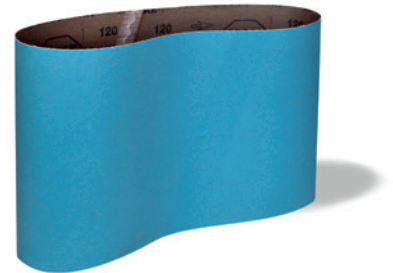

Grits

Ceramic, zirconia, # and * = non P-Grits

| | | | | | | | | | | | | | | |
|--------------------------------|--------------------------------|--|--------------------------------|--|--|--------------------------------|--|--|---|---|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| <input type="checkbox"/> P 12 | <input type="checkbox"/> P 16 | <input checked="" type="checkbox"/> 24 | <input type="checkbox"/> P 30 | <input checked="" type="checkbox"/> 36 | <input checked="" type="checkbox"/> 40 | <input type="checkbox"/> P 50 | <input checked="" type="checkbox"/> 60 | <input checked="" type="checkbox"/> 80 | <input checked="" type="checkbox"/> 100 | <input checked="" type="checkbox"/> 120 | <input type="checkbox"/> P 150 | <input type="checkbox"/> P 180 | <input type="checkbox"/> P 220 | <input type="checkbox"/> P 240 |
| <input type="checkbox"/> P 280 | <input type="checkbox"/> P 320 | <input type="checkbox"/> P 360 | <input type="checkbox"/> P 400 | <input type="checkbox"/> P 500 | <input type="checkbox"/> P 600 | <input type="checkbox"/> P 800 | <input type="checkbox"/> P 1.000 | <input type="checkbox"/> P 1.200 | <input type="checkbox"/> P 1.500 | <input type="checkbox"/> P 2.000 | <input type="checkbox"/> P 2.500 | <input type="checkbox"/> ST 3.000 | <input type="checkbox"/> ST 6.000 | <input type="checkbox"/> ST 8.000 |


Materials

| | | | | | | | | | |
|-----------|-------------------|-----------------|--------------|----------|---------------|-------|------|----------|-------------|
| Aluminium | Non-ferrous Metal | Stainless steel | Steel | Titanium | Paint lacquer | Glass | Wood | Plastics | Stone/china |
|-----------|-------------------|-----------------|--------------|----------|---------------|-------|------|----------|-------------|

Application examples



Deburring

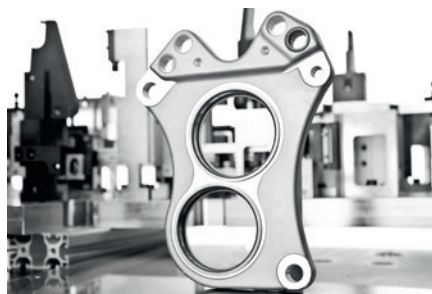

Aluminium castings



Steel sheet and welding seams

- Optimised combination of zirconia and aluminium oxide for sharp grinding
- Strong x-weight cotton backing for a high strength and long belt life
- As strong grip velcro disc for achieving best performances on metal working with angle grinder and orbital sander

