



# WOOD FINISHES DIRECT

The following Product Datasheet is provided by **Woca**

Wood Finishes Direct cannot be held liable for the information contained within this document.

For purchasing information visit:  
[Woca Maintenance Box for Oiled Floors](#)



1 PREPARE 2 TREAT 3 MAINTAIN

# MAINTENANCE OIL



### Improves resistance

Revitalises oil-treated wood. Makes floors even more durable. For occasional maintenance.



### Natural appearance

Gives the wood a beautiful, breathable surface. Highlights the glow and grain structure of the wood.



### Easy to apply

The oil is smooth and pleasant to work with. Simple application both manually and by machine.



### Indoor climate labelled

Ensures a good working environment during application. Does not harm indoor air quality.

## PRODUCT DESCRIPTION



Maintenance Oil may be used for the maintenance of all oxidative oiled wood surfaces and is especially suitable for the regular maintenance of oiled wood floors. Can be applied manually with a polishing pad and by machine (floors larger than 8-10 m<sup>2</sup>).

## APPLICATION AREA

For care and maintenance of all oxidative oiled wood surfaces, especially floors.

### Product information

Coverage: 30-40 m<sup>2</sup>/L  
Packaging: 1L + 2.5L  
Colours: 5 colours

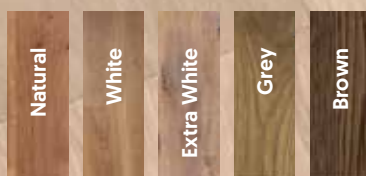



## WORK DESCRIPTION


### Preparation

Product, room and floor temperature should be between 15–35°C. Ensure good ventilation at all times during the application and drying time.

Clean the floor with WOCA Intensive Wood Cleaner. Leave the floor to dry for at least 8 hours. The floor must be completely dry.

### Drying time

When polished with polishing machine the floor will be pre-hardened after approx. 4 hours at 20°C and may cautiously be taken into use. Manually polished floors may be taken into use after 24 hours. Do not expose the floor to water during hardening time of 24 hours.




CLEANING



APPLICATION



POLISHING



WIPING OFF

## TREATMENT

- 1 Shake the container carefully.
- 2 Apply approx. 1 dl oil per 4 m<sup>2</sup> with pad, short-haired paint roller, cotton cloth or use polishing machine for large surfaces.
- 3 It is important that the Maintenance Oil is carefully polished into the wood. Continue polishing until the wood appears saturated and the surface looks uniform.
- 4 Wipe the floor with clean, dry cotton cloths before proceeding with the next section. The floor should not appear wet and there should not be any excess oil left on the surface after polishing.

Continue stepwise till the floor has been finished.